




METAFORA SPEC SHEET

DEMOUNTABLE WALL

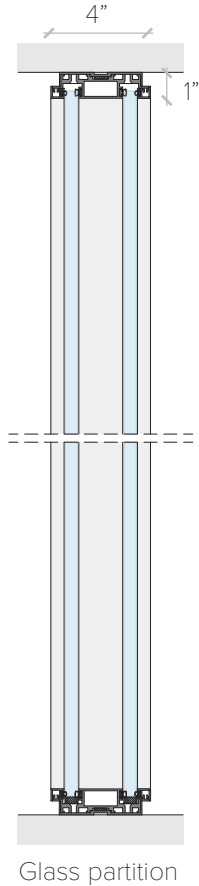


FRAMING

- Aluminum frame, 1" high x 4" wide, continuous 1/2" reveal around full perimeter
- Top & Bottom track with snap on trim
- Profiles cut on site
- Tolerance - 1/4" / + 3/8"
- Lead times: 10 - 12 weeks after approved shop drawings
- Finishes: Silver, polished, bronze. Anodized aluminum NECE colors and powder coated RAL colors


DOUBLE GLASS

- Tempered or Laminated glass
- (2) layers of 3/8" (10mm) and 1/2" (12mm)
- Fully sealed with acoustic gaskets
- Panel allowances: 6 ft. by 11 ft. maximum. Transom available for openings higher than 11 ft
- Panels limited to individual freight car dimensions
- STC 40-43
- Glass tailored to space specific design requirements
- 4-6 weeks lead time after field dimensions depending on glass finish
- Finishes: Acid-etched, back painted, decorative glass, Electrified Privacy glass, etc

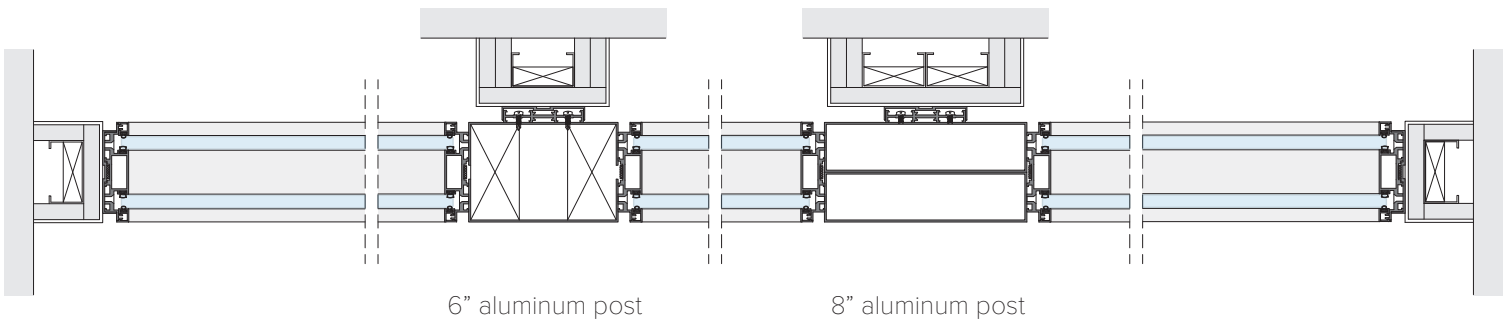

6" aluminum post

8" aluminum post

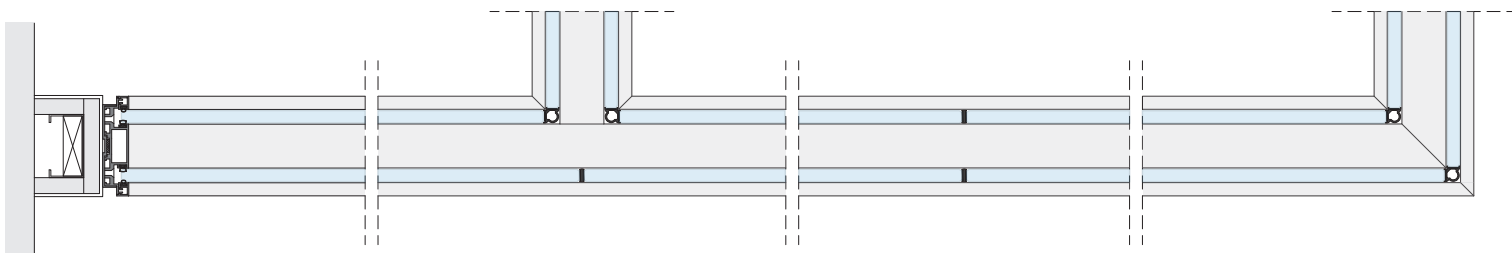

3-way connection


aluminum mullion

90° connection



METAFORA SPEC SHEET



DEMOUNTABLE WALL

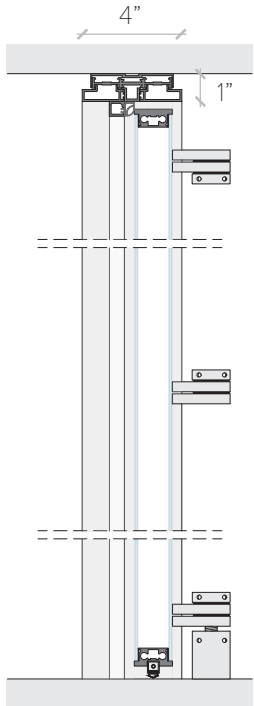

Swing Door


SWING DOOR

- Doors available in glass or wood
- 4mm + 4mm thick tempered glass, frameless leaf
- Door jambs and track dimensions remain consistent and homogenous with perimeter profiles
- Offset aluminum pivot hinges (3) up to 9'-6", (4) up to 11'-0"
- Acoustic gaskets at door jambs and bottom drop seals
- Proprietary aesthetic integrated hardware
- Concealed overhead closers available
- Fully compliant with US locking requirements and ADA codes
- Special finishes available upon request

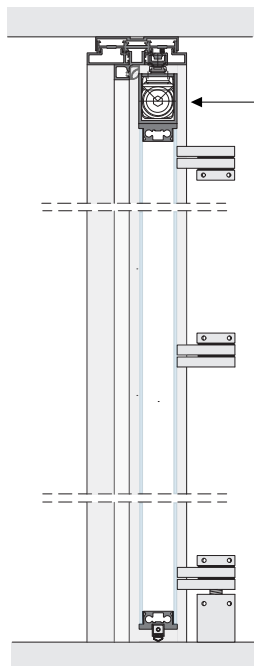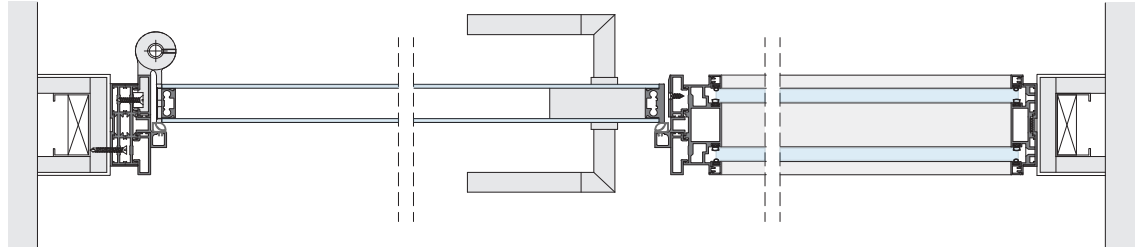

concealed
overhead
closer

Swing Door with
overhead closer

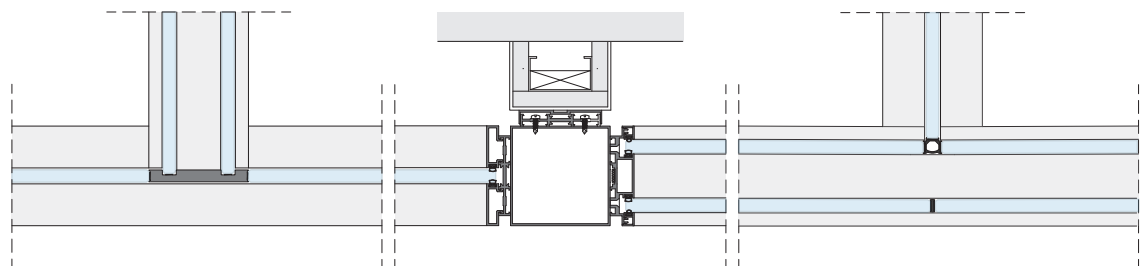

3-way connection

4" aluminum post

3-way connection